


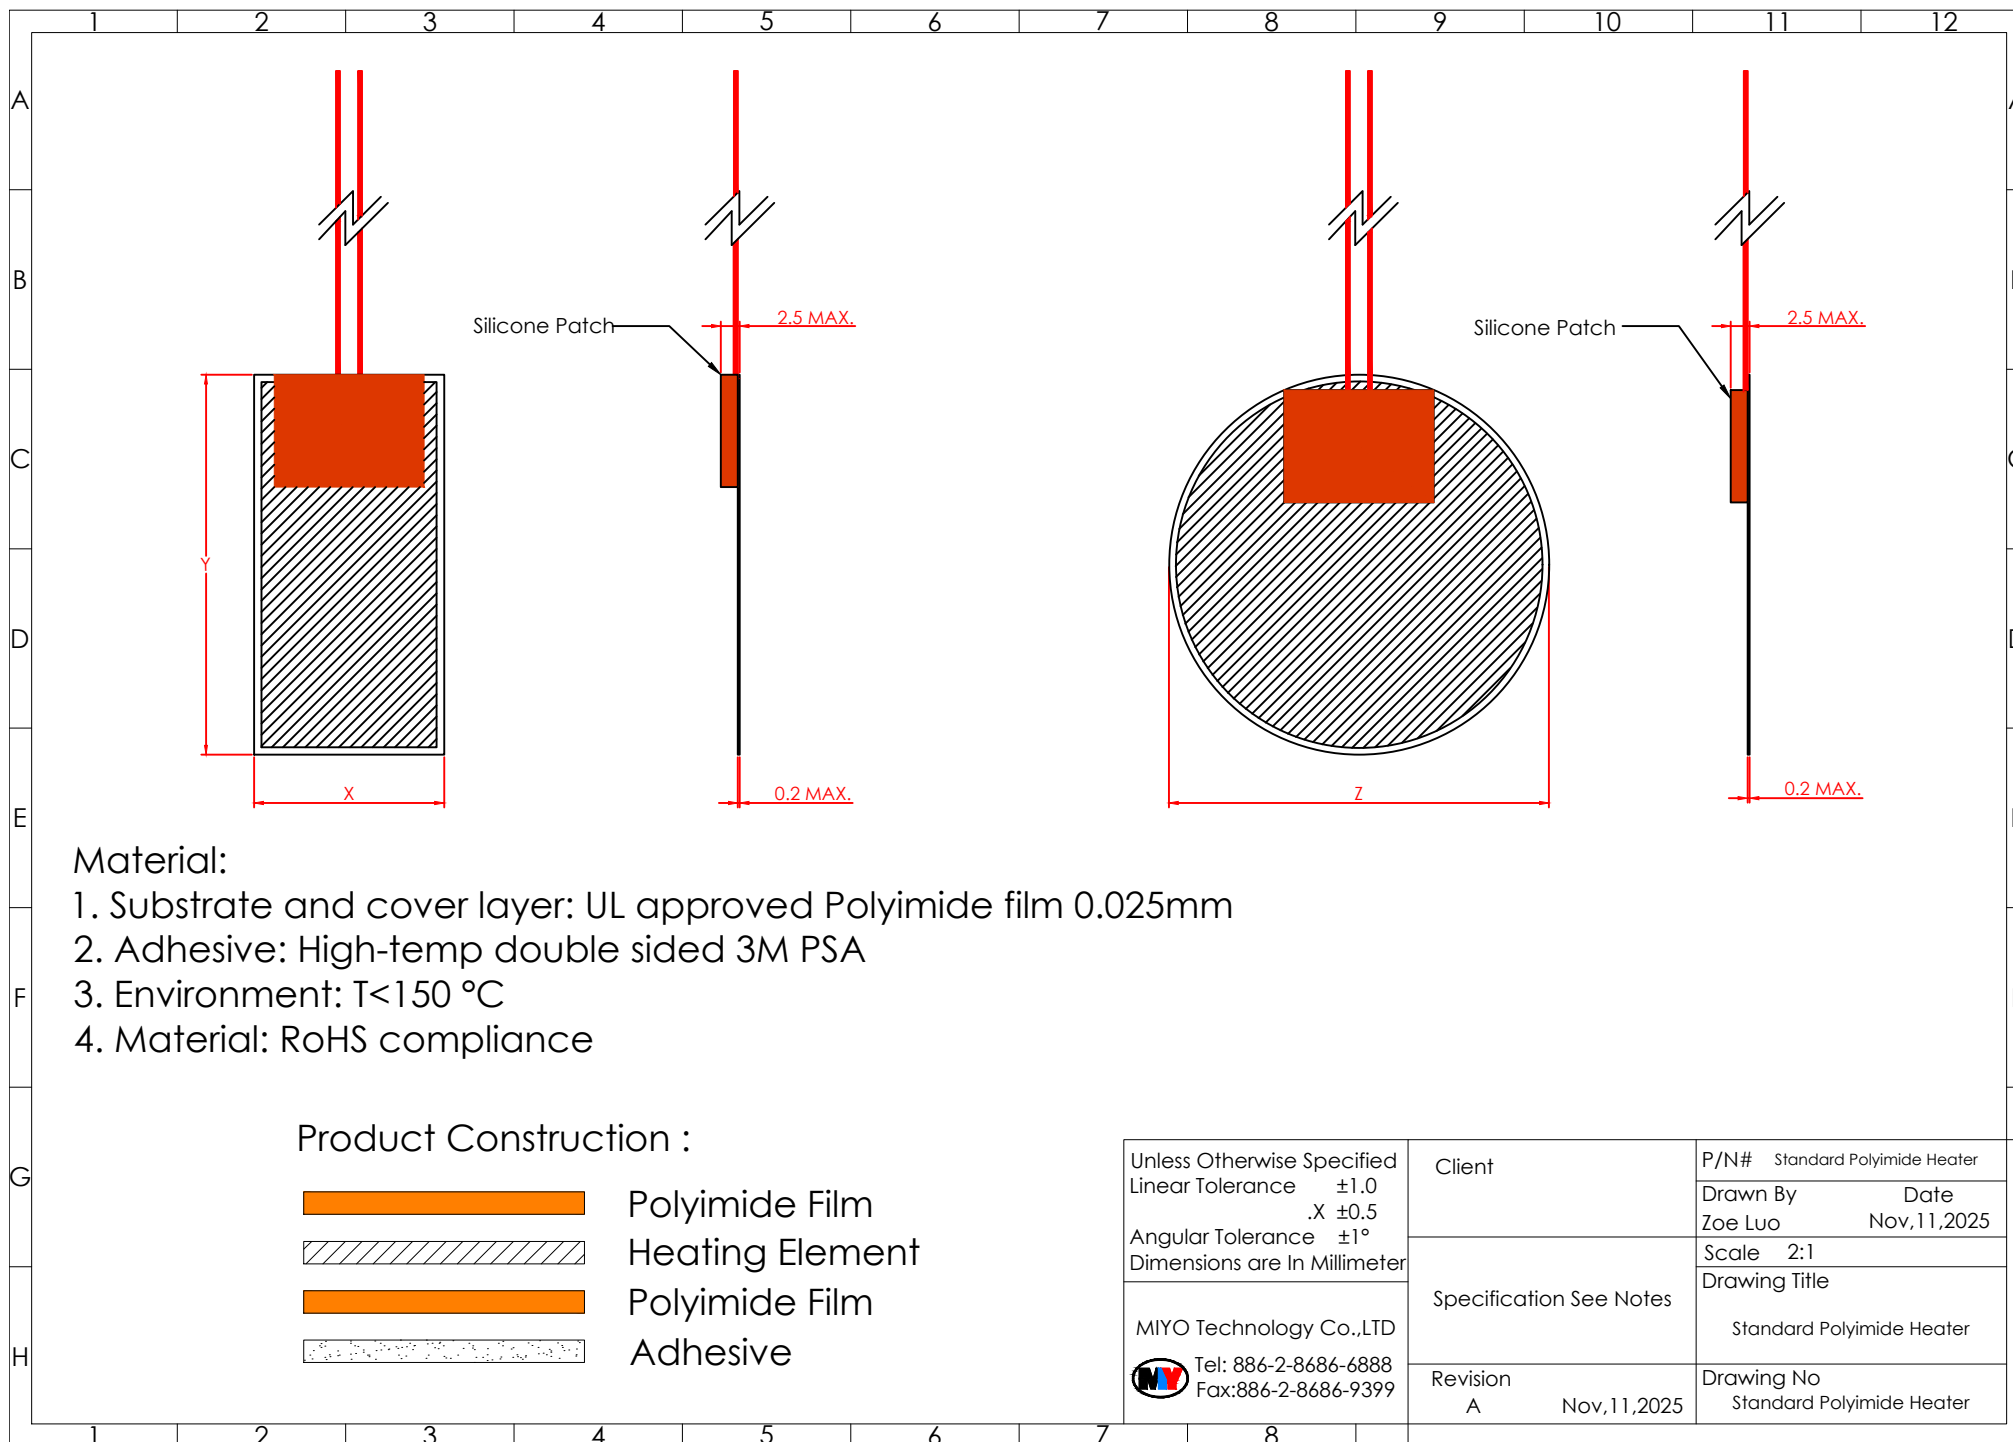

	1	2	3	4	5	6	7	8	9	10	11	12											
A																							
	Item	SIZE (in)		SIZE (mm)		Resistance options in ohms																	
		X	Y	X	Y	Tolerance ± 10%																	
B	1	0.5	2	12.7	50.8	78.4	156.8																
	2	0.5	4	12.7	101.6	78.4	156.8																
	3	1	1	25.4	25.4	78.4	156.8																
	4	1	2	25.4	50.8	39.2	78.4	661.3															
	5	1	3	25.4	76.2	52.3	440.8																
C	6	1	4	25.4	101.6	19.6	39.2	78.4	330.6	661.3													
	7	1	5	25.4	127	15.7	31.4	62.7	264.5	529.0	2116.0												
	8	1	6	25.4	152.4	220.4	440.8	1763.3															
	9	1	8	25.4	203.2	165.3	330.6																
	10	1	10	25.4	254	132.3	264.5	529.0															
D	11	1	12	25.4	304.8	26.1	110.2	220.4	440.8														
	12	2	2	50.8	50.8	19.6	39.2	78.4	330.6	661.3	1322.5												
	13	2	3	50.8	76.2	13.1	26.1	52.3	220.4	440.8	881.7												
	14	2	4	50.8	101.6	9.8	19.6	39.2	165.3	330.6	661.3	1322.5											
	15	2	5	50.8	127	7.8	15.7	31.4	132.3	264.5													
E	16	2	6	50.8	152.4	110.2	220.4	440.8	881.7														
	17	2	8	50.8	203.2	82.7	165.3	330.6															
	18	2	10	50.8	254	66.1	132.3																
	19	2	12	50.8	304.8	55.1	110.2																
	20	3	3	76.2	76.2	8.7	17.4	146.9	293.9														
F	21	3	4	76.2	101.6	110.2	220.4	881.7															
	22	3	5	76.2	127	88.2	176.3																
	23	3	6	76.2	152.4	73.5	146.9	587.8															
	24	3	8	76.2	203.2	55.1	110.2																
	25	3	10	76.2	254	44.1	88.2																
G	26	3	12	76.2	304.8	36.7	73.5	146.9	293.9	587.8													
	27	4	4	101.6	101.6	82.7	165.3	661.3															
	28	4	5	101.6	127	66.1	132.3																
	29	4	6	101.6	152.4	55.1	110.2	440.8															
	30	4	8	101.6	203.2	41.3	82.7																
H	31	4	10	101.6	254	33.1	66.1																
	32	4	12	101.6	304.8	27.6	55.1																
	1	2	3	4	5	6	7	8															

	Item	SIZE (in)		SIZE (mm)		Resistance options in ohms												
		X	Y	X	Y	Tolerance ± 10%												
	33	5	5	127	127	52.9	105.8											
	34	5	6	127	152.4	44.1	88.2											
	35	5	8	127	203.2	33.1	66.1	132.3										
	36	5	10	127	254	26.5	52.9	105.8										
	37	5	12	127	304.8	22.0	44.1											
	38	6	6	152.4	152.4	36.7	73.5	293.9										
	39	6	8	152.4	203.2	27.6	110.2											
	40	6	12	152.4	304.8	18.4	36.7											
	41	8	8	203.2	203.2	20.7	41.3											
	42	8	10	203.2	254	33.1												
	43	8	12	203.2	304.8	13.8	27.6											

	Item	SIZE (in)	SIZE (mm)	Resistance options in ohms		
		Z	Z	Tolerance ± 10%		
	44	2	50.8	421.2	842.4	
	45	3	76.2	187.2	374.4	1497.5
	46	4	101.6	105.3	210.6	842.4
	47	5	127	67.4	134.8	
	48	6	152.4	46.8		
	49	7	177.8	137.5		
	50	8	203.2	52.6		

Unless Otherwise Specified Linear Tolerance ±1.0 $\times \pm 0.5$ Angular Tolerance ±1° Dimensions are In Millimeter MIYO Technology Co.,LTD  Tel: 886-2-8686-6888 Fax:886-2-8686-9399	Client	P/N# Standard Polyimide Heater List		
		Drawn By Zoe Luo	Date Nov,11,2025	
		Specification See Notes	Scale 2:1	
			Drawing Title Standard Polyimide Heater List	
 Tel: 886-2-8686-6888 Fax:886-2-8686-9399	Revision A	Nov,11,2025	Drawing No Standard Polyimide Heater List	